



Coaxial Cavity Dual Frequency Combiner 903 - 926MHz



Features

- High Isolation
- Low Insertion Loss
- Excellent Temperature Stability
- Customization available upon request



Electrical Specifications , $T_A=25^\circ\text{C}$

Parameters	TX			RX			Units
	Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range	903		906	923		926	MHz
Return Loss	21	23		21	23		dB
Insertion Loss		1.1	1.2		1.1	1.2	dB
Pass Band Ripple		0.15	0.3		0.15	0.3	dB
Port Isolation	50	70		50	70		dB
Nominal Coupling	29	30	31	29	30	31	dB
Power Rating	Average		50			50	W
	Peak		0.5			0.5	KW
Impedance	50						Ohms
Weight	28.22						ounces
Input / Output Connectors	SMA - Female						
Material	Aluminum						
Finishing	Black Paint						


Environmental Specifications

Operational Temperature (°C)	-25 ~ +70
Storage Temperature (°C)	-40 ~ +85
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40 °C
Shock	20G for 11msec half sine wave, 3 axis both directions




Typical Performance Plots

Coupling and VSWR

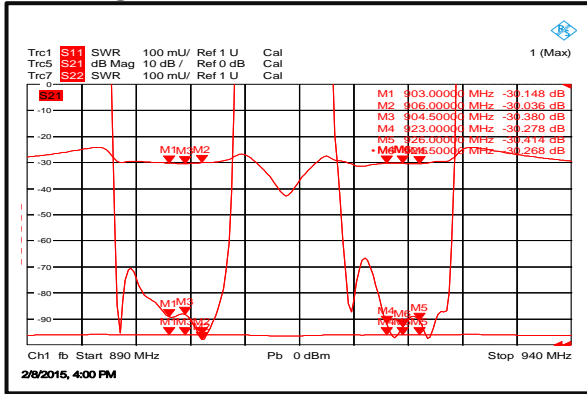


Insertion Loss, Return Loss and Isolation

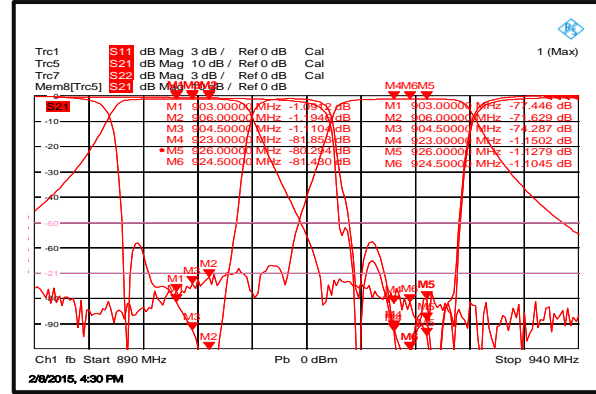

Outline Drawing:

All Dimensions in mm [inches]

Tolerance ± 0.25 [0.01]

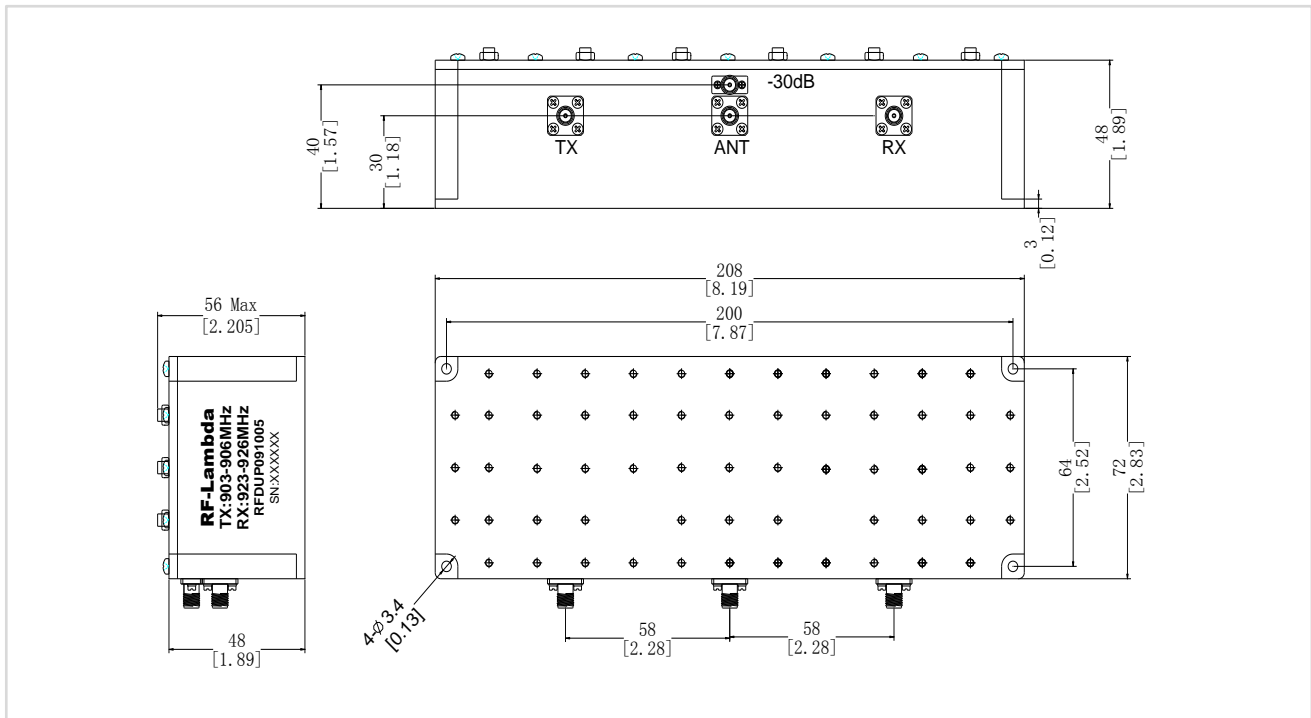

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Coaxial Cavity Dual Frequency Combiner 903 - 926MHz