



MANUAL CONTROL STEP ATTENUATOR (DC-3GHZ 60DB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- High power handle up to 10W CW upon request
- Custom Configurations Available Upon Request.






Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

| Part Number | Frequency | Power (Watts) | Attenuation Range (dB) | Attenuation Step (dB) | VSWR max. | Insertion Loss (dB) | Accuracy (dB) |
|-------------|-----------|---------------|------------------------|-----------------------|-----------|---------------------|---------------------------------|
| RKT10G3A60 | DC-2.5GHz | 10 | 60dB | 1.0dB | 1.40 | ≤ 3.6 | ± 0.5 (single) ± 0.75 (16dB) |

Connector: SMA / N type is available, weight: 250g

Temperature (Operational): -10°C~+50°C (Storage) -40°C~+70°C

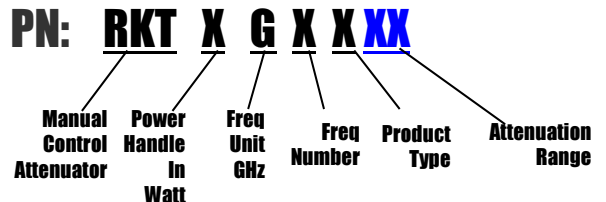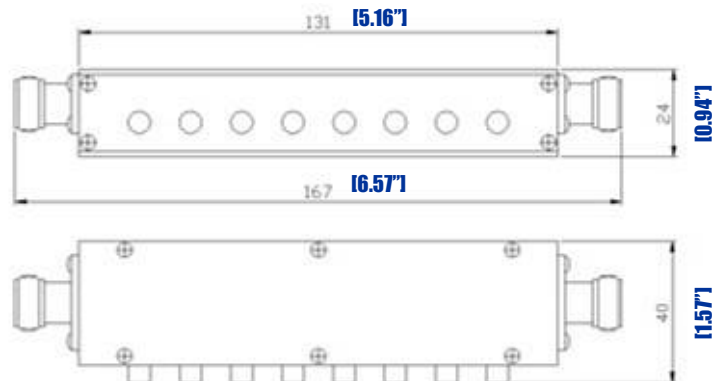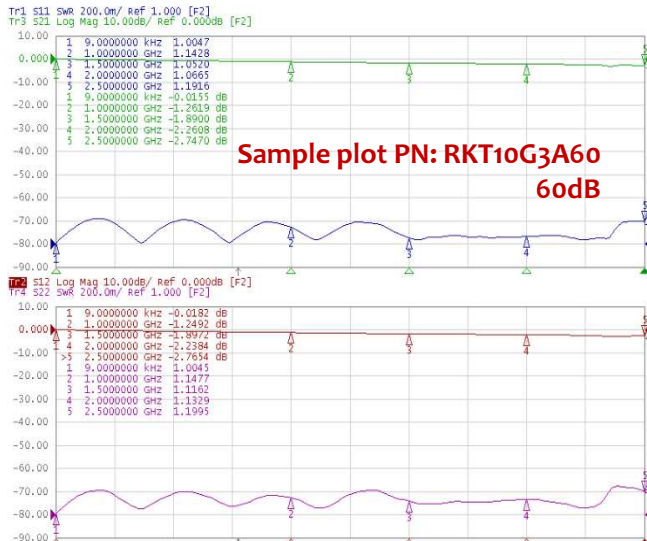

MANUAL CONTROL STEP ATTENUATOR (DC-3GHZ 60DB RANGE)




RF-LAMBDA

The power beyond expectations

RKT10G3A60

MANUAL CONTROL STEP ATTENUATOR (DC-3GHz 60dB RANGE)

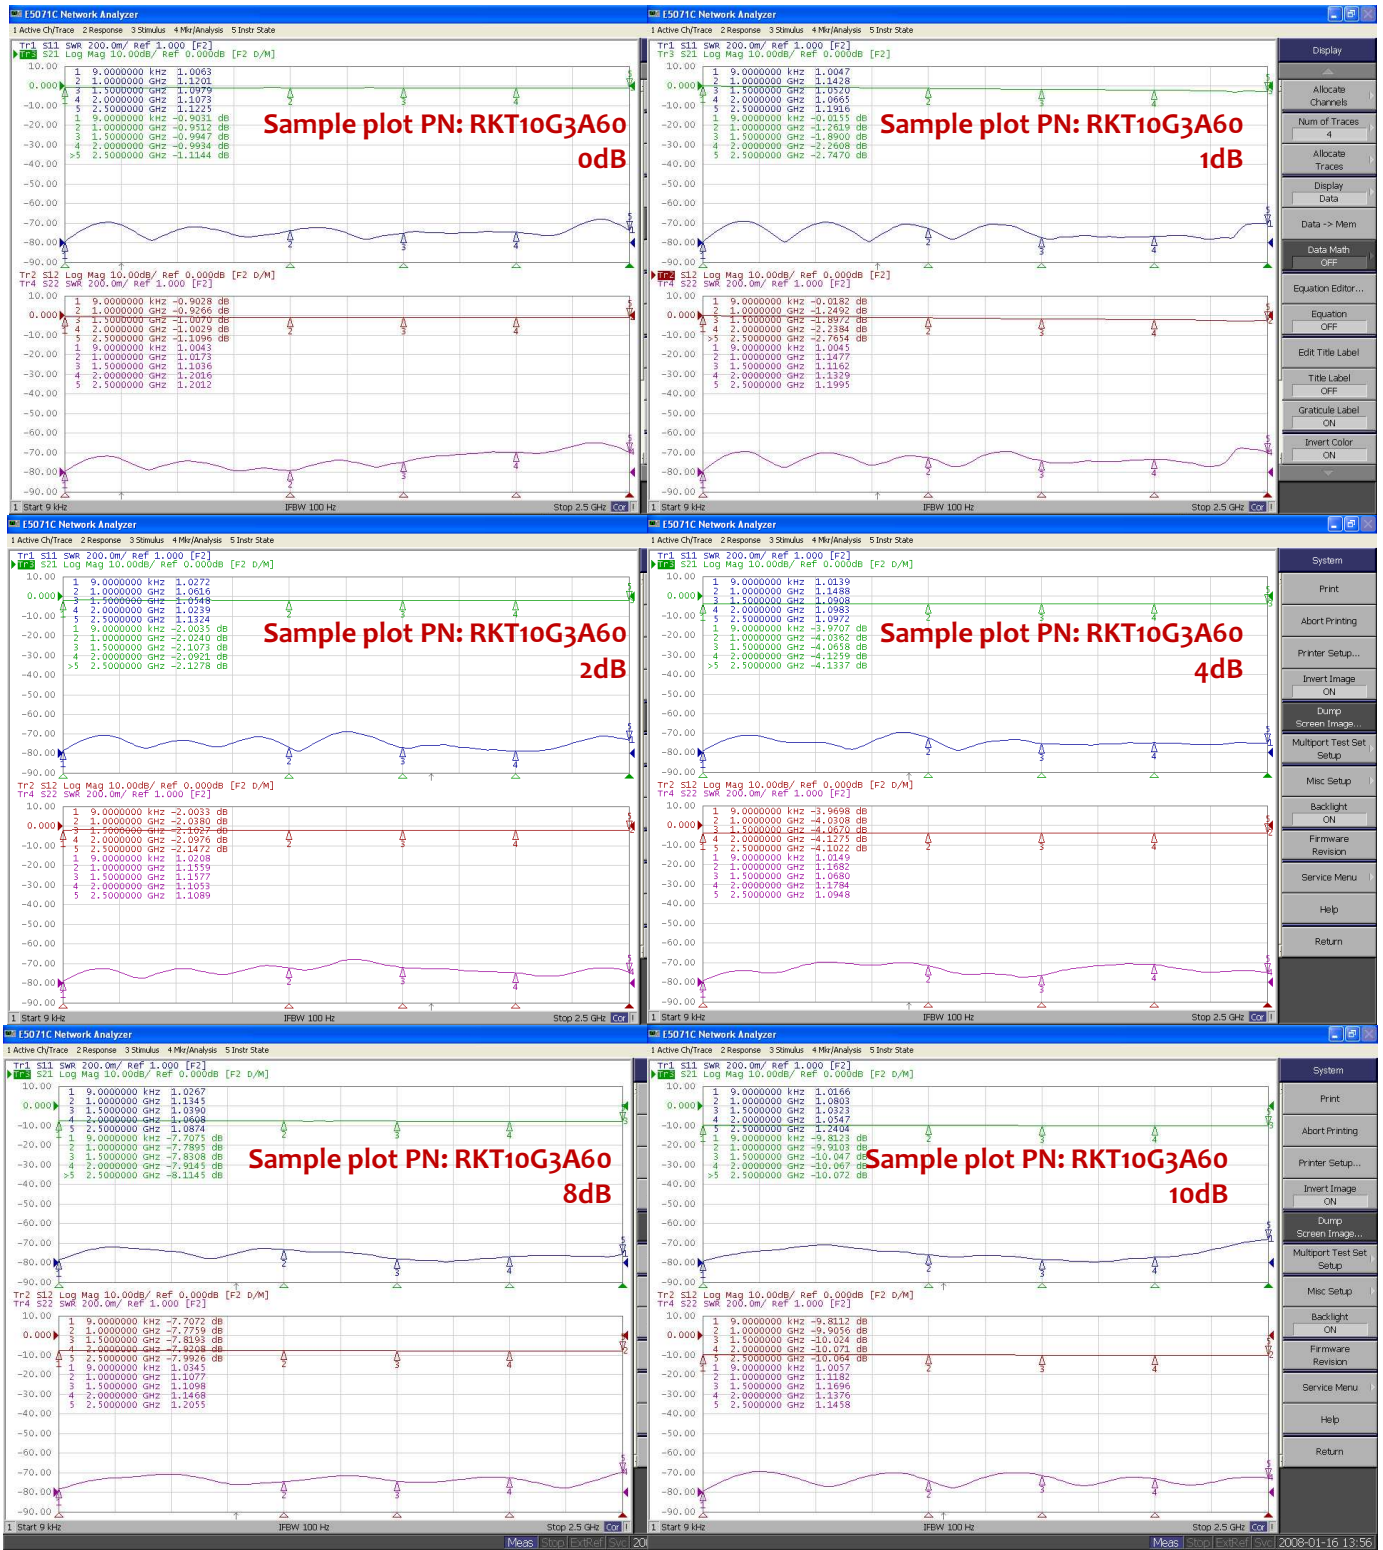



RF-LAMBDA

The power beyond expectations

RKT10G3A60

MANUAL CONTROL STEP ATTENUATOR (DC-3GHz 60dB RANGE)

