



ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-1GHz 101DB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- 2W CW average power upon request
- Custom Configurations Available Upon Request.



Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.



Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G1A101	DC-1GHz	2	101	0.1	1.20	≤ 0.8	± 0.2dB(0.1~1dB) ± 0.4dB(1~10dB) ± 0.8dB(10~60dB) ± 1.5dB(<70dB) ± 4%(>70dB)

Connector: N type, weight: 1250g

Temperature

(Operational): -10° C~+50° C

(Storage) -40° C~+70° C

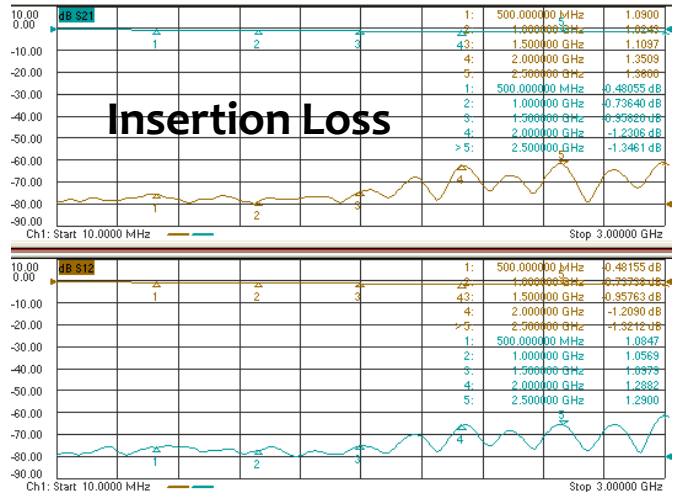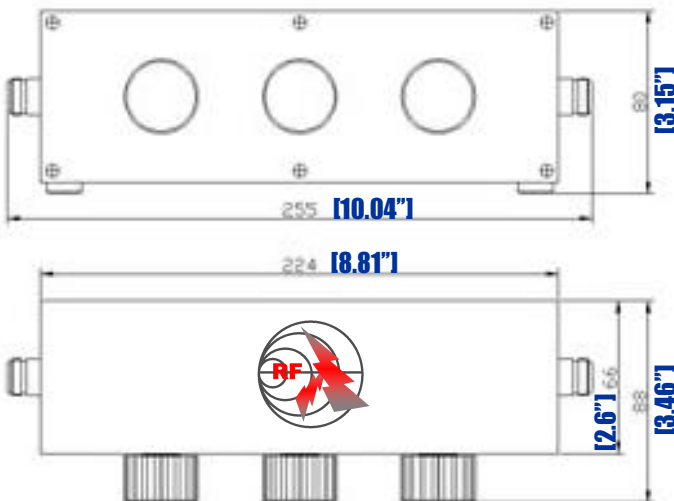

PN: RKT 2 G X A 101

Manual Control Attenuator | Power Handle In Watt | Freq Unit GHz | Freq Number | Product Type | Attenuation Range

MANUAL CONTROL STEP ATTENUATOR (DC-1GHz 101DB RANGE)




RF-LAMBDA


The power beyond expectations

RKT2G1A101

19" X 2U RACK MOUNTING PACKAGE AVAILABLE

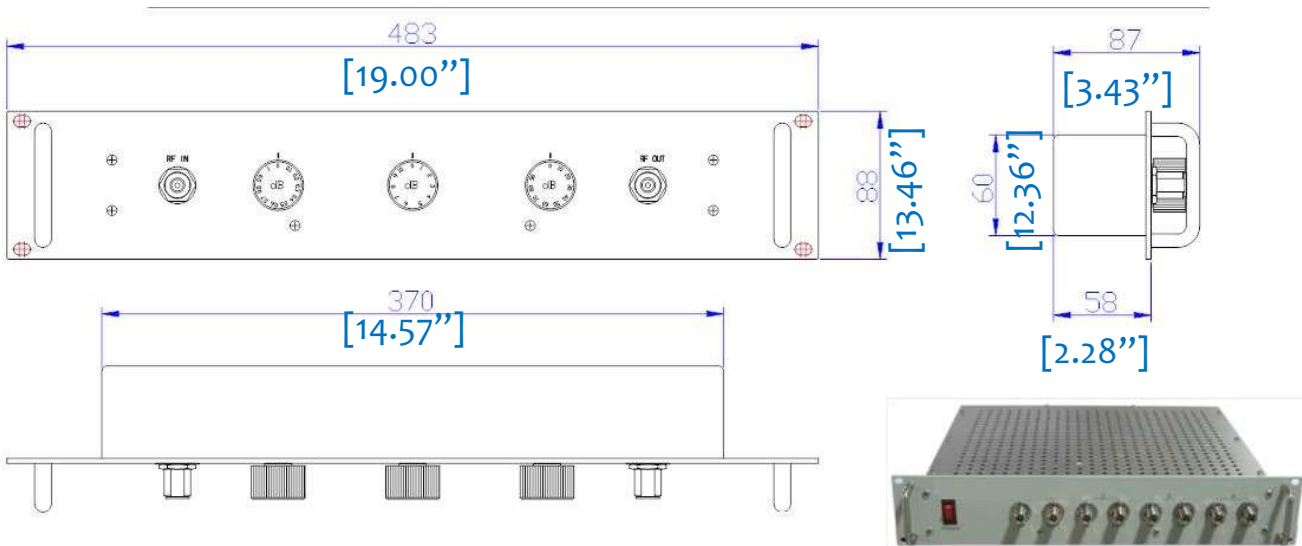

MANUAL CONTROL STEP ATTENUATOR (DC-16GHz 101DB RANGE)

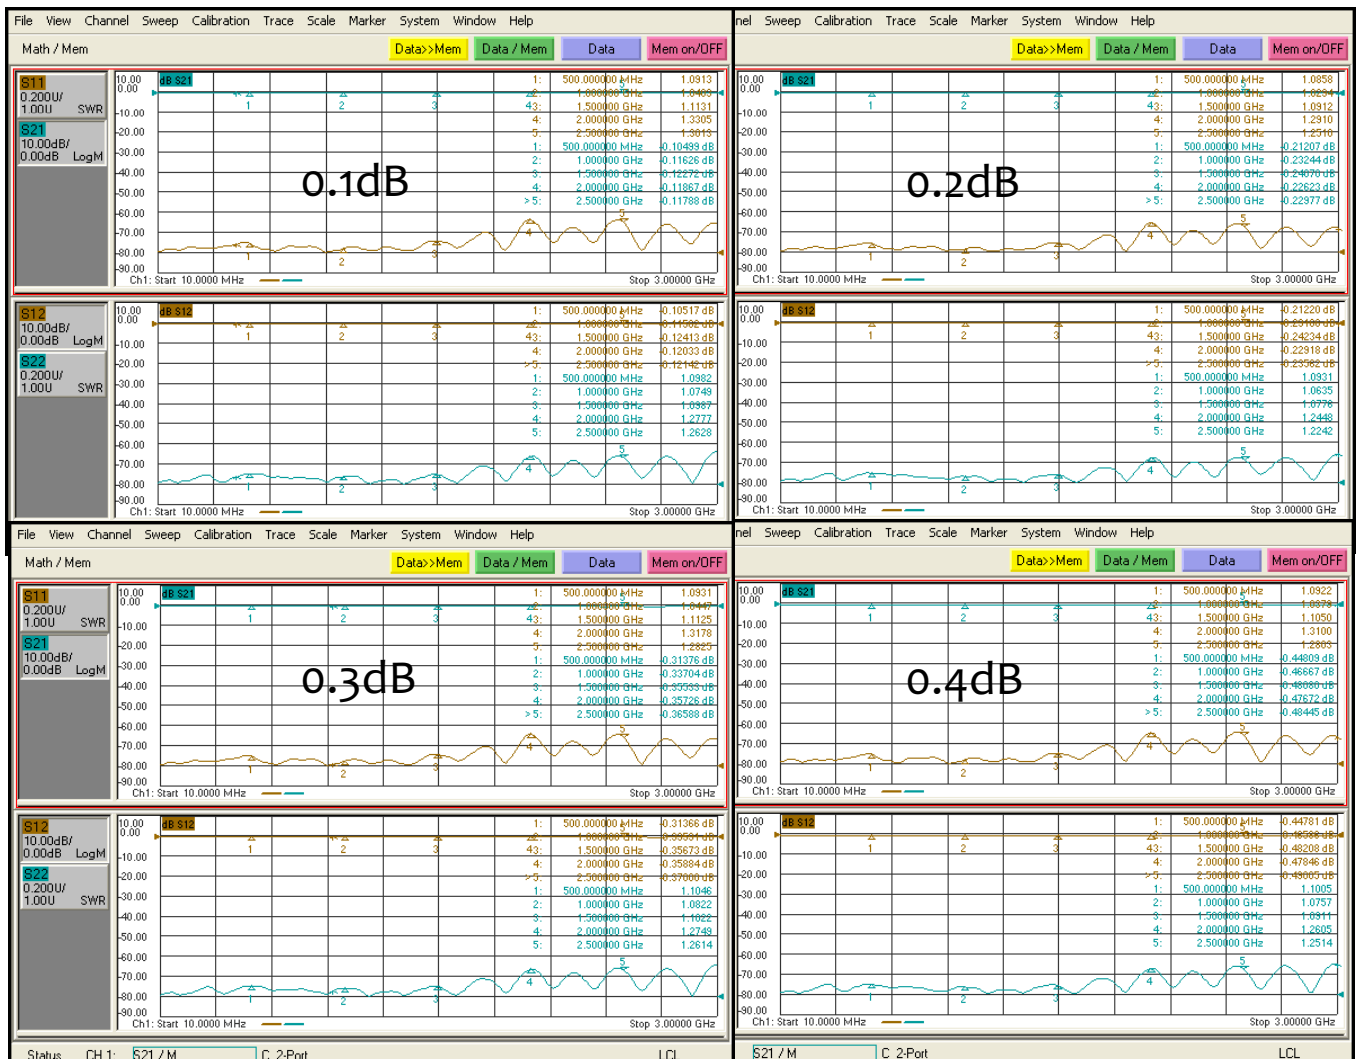







RF-LAMBDA

The power beyond expectations

RKT2G1A101

MANUAL CONTROL STEP ATTENUATOR (DC-16GHz 101DB RANGE)

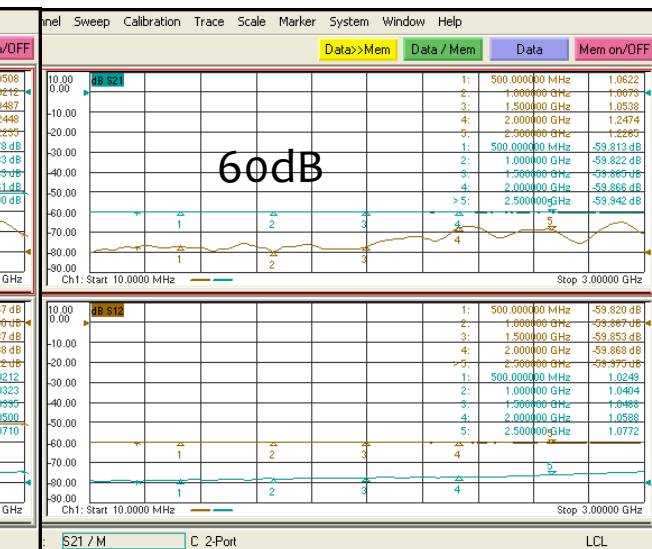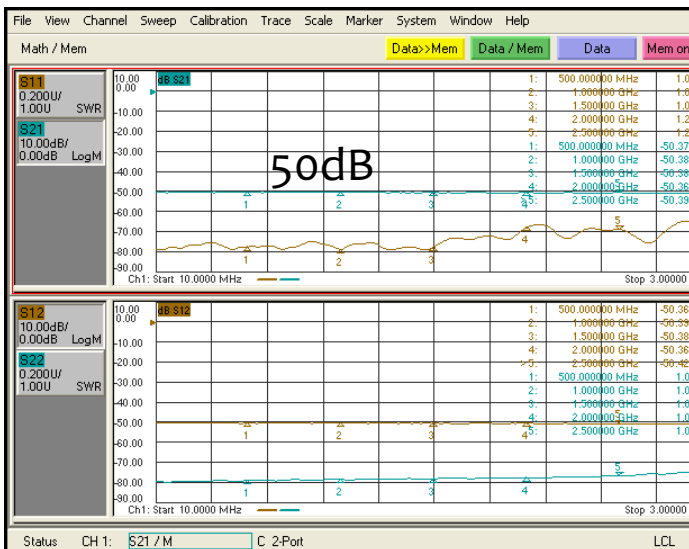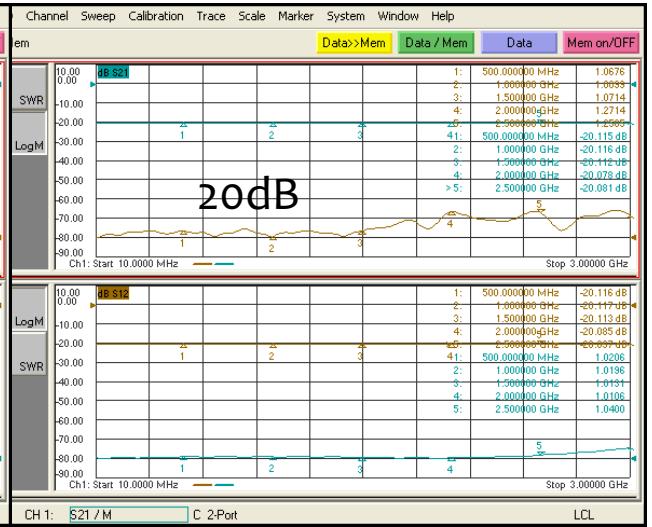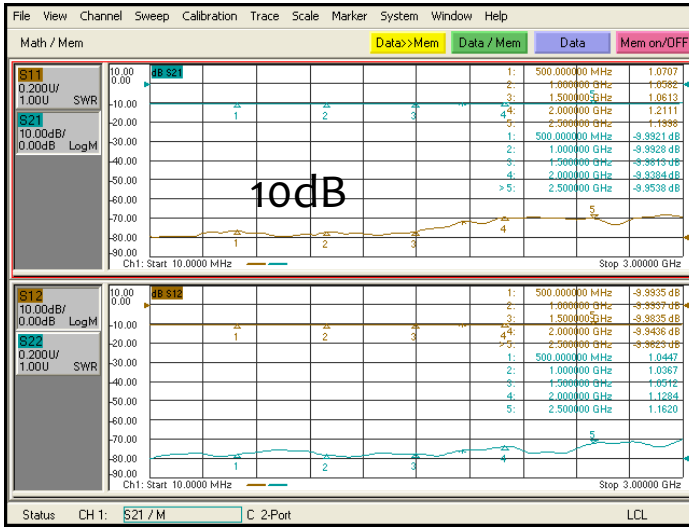



RF-LAMBDA

The power beyond expectations

RKT2G1A101

MANUAL CONTROL STEP ATTENUATOR (DC-16GHz 101DB RANGE)

