



RF-LAMBDA

The power beyond expectations

RKT2G1A130

ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-1GHz 130dB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- 2W CW average power upon request
- Custom Configurations Available Upon Request.




Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G1A130	DC-1GHz	2	130	1	1.20	≤ 1.0	± 0.4(1~10dB) ± 0.6(10~60dB) ± 5%(≥60dB)

Connector: N type, weight: 1250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

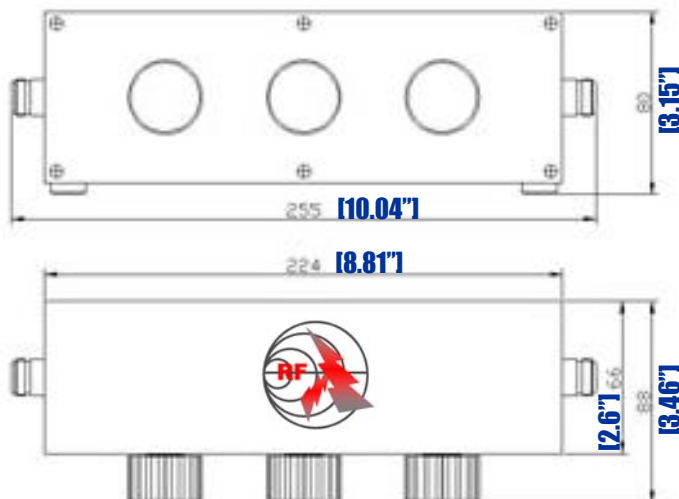

19" X 2U RACK MOUNTING PACKAGE AVAILABLE

PN: **RKT 2 G X A 130**

Manual Control Attenuator | Power Handle In Watt | Freq Unit GHz | Freq Number | Product Type | Attenuation Range

MANUAL CONTROL STEP ATTENUATOR (DC-1GHz 130DB RANGE)






RF-LAMBDA

The power beyond expectations

RKT2G1A130

19" X 2U RACK MOUNTING PACKAGE AVAILABLE

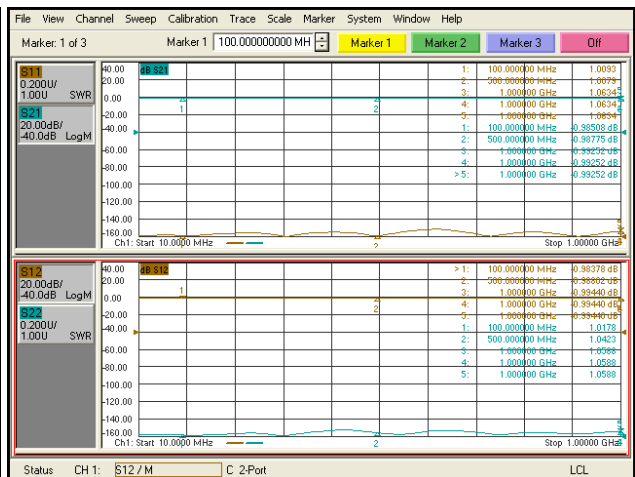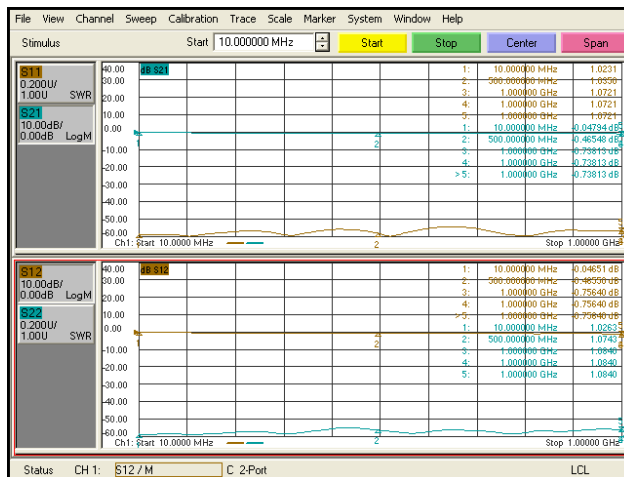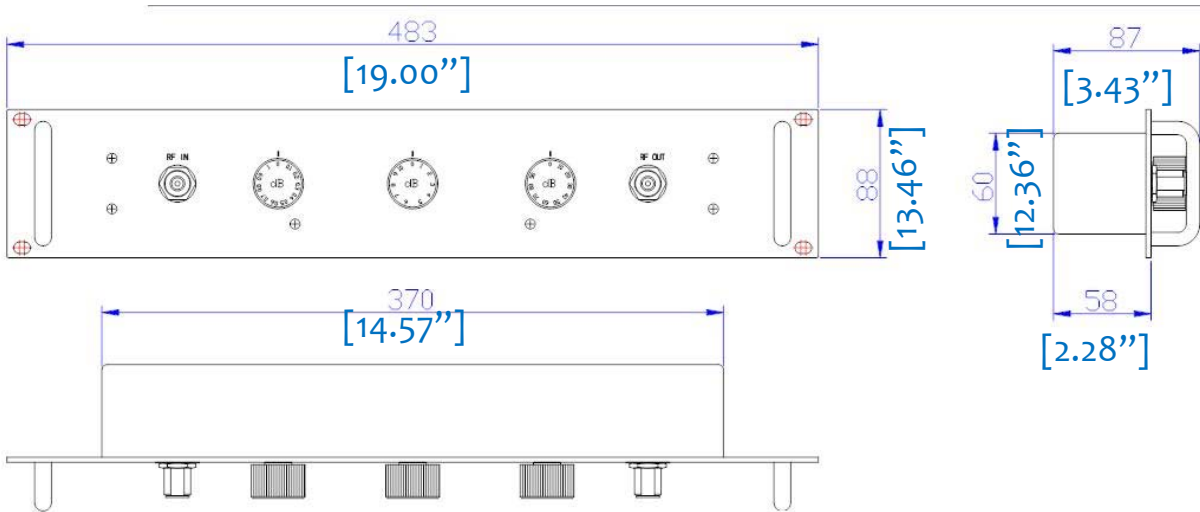

MANUAL CONTROL STEP ATTENUATOR

(DC-1GHz 130DB RANGE)









RF-LAMBDA

The power beyond expectations

RKT2G1A130

MANUAL CONTROL STEP ATTENUATOR (DC-16GHZ 130DB RANGE)

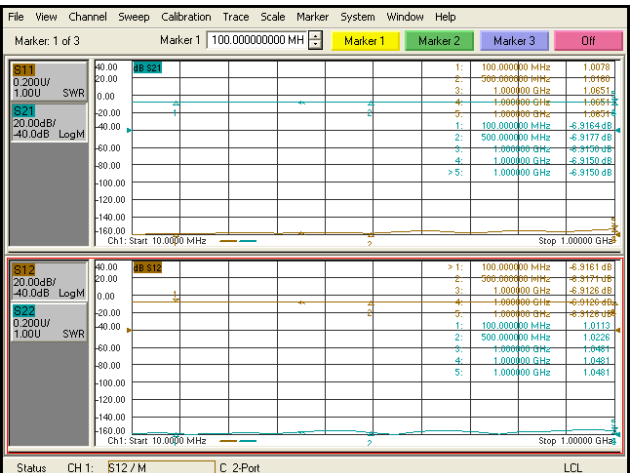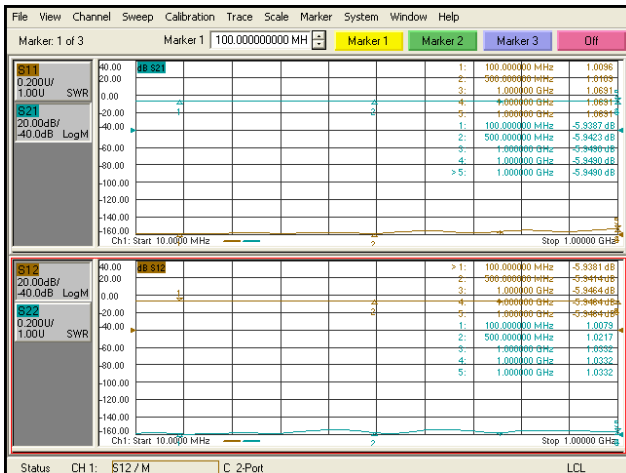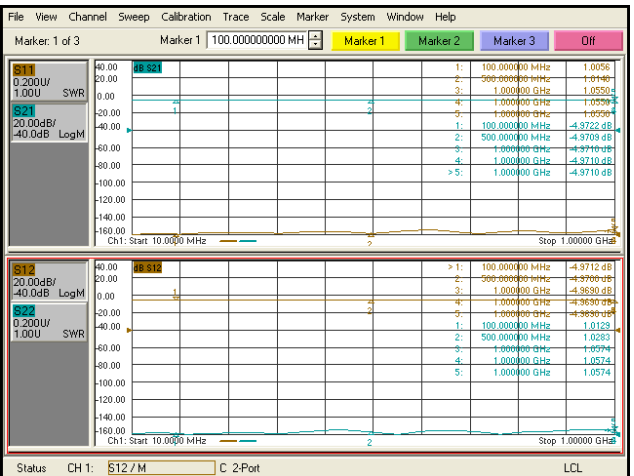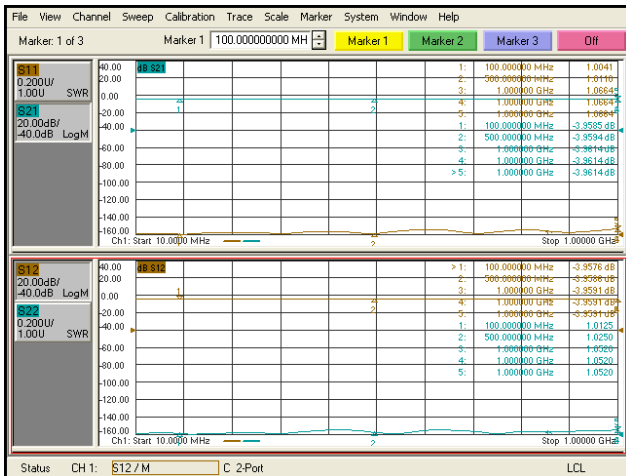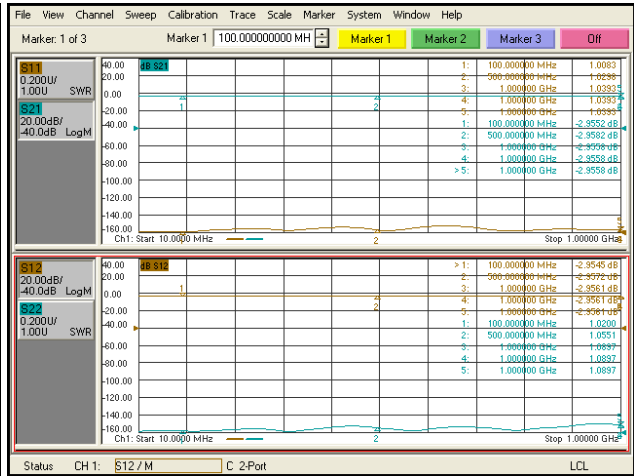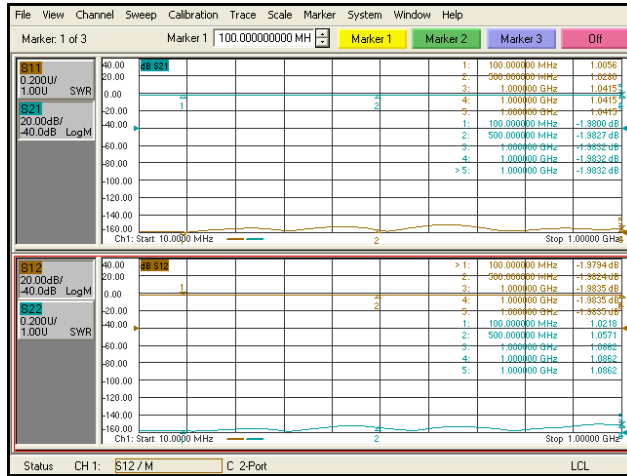









RF-LAMBDA

The power beyond expectations

RKT2G1A130

MANUAL CONTROL STEP ATTENUATOR (DC-16GHZ 130DB RANGE)

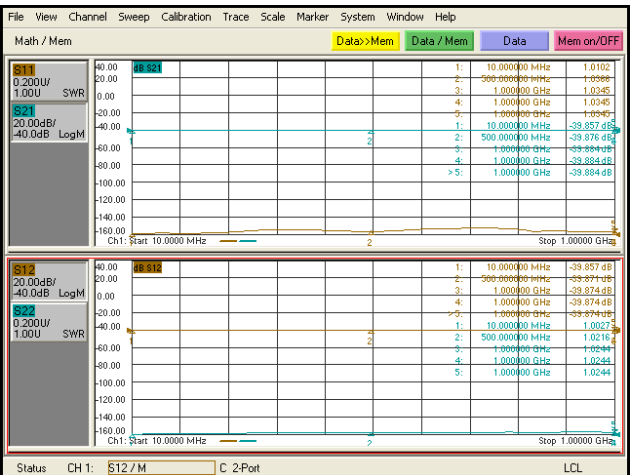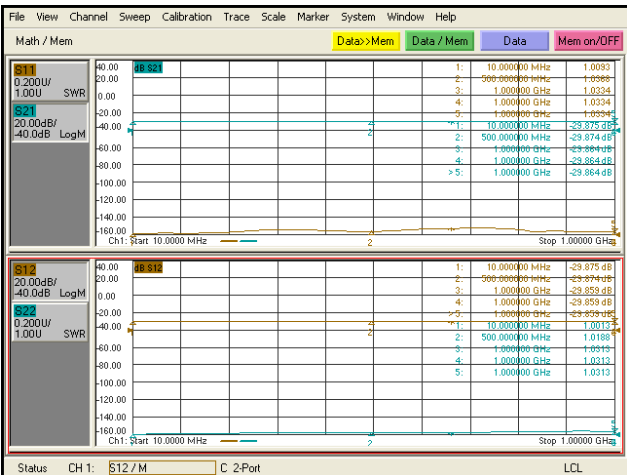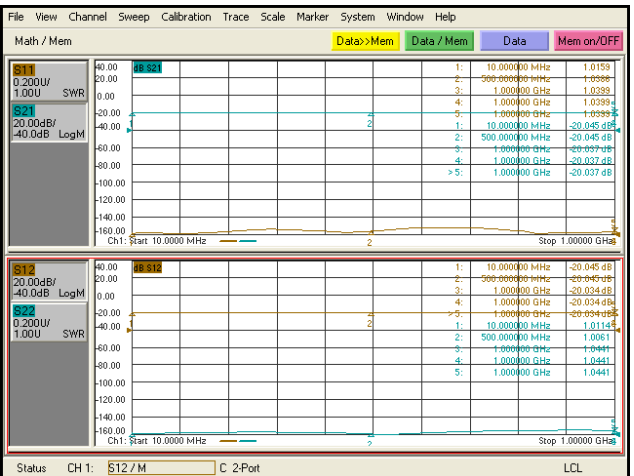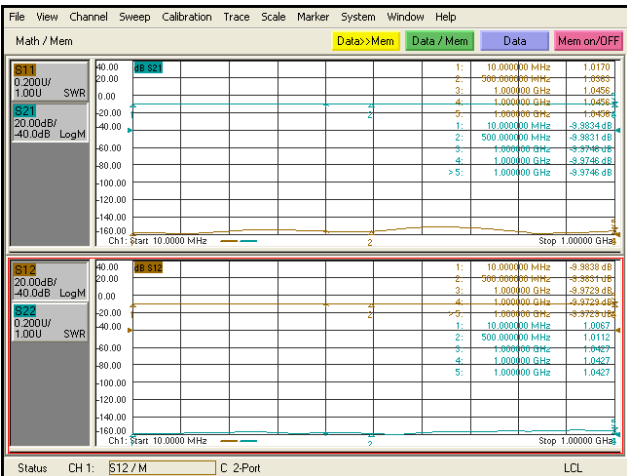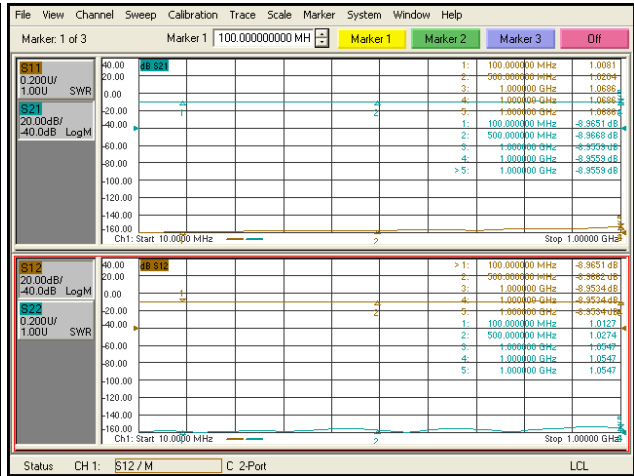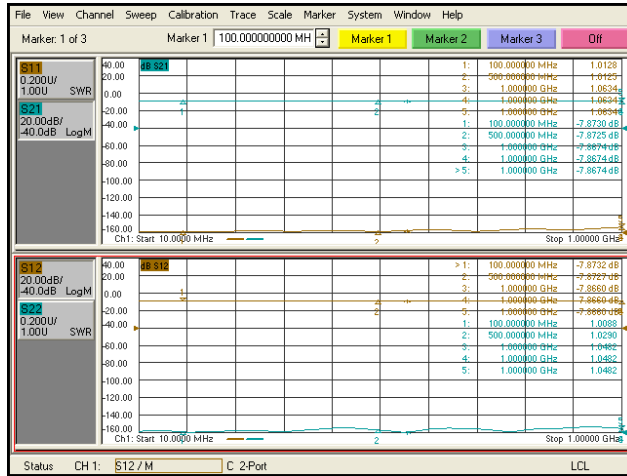







RF-LAMBDA

The power beyond expectations

RKT2G1A130

MANUAL CONTROL STEP ATTENUATOR (DC-16GHZ 130DB RANGE)

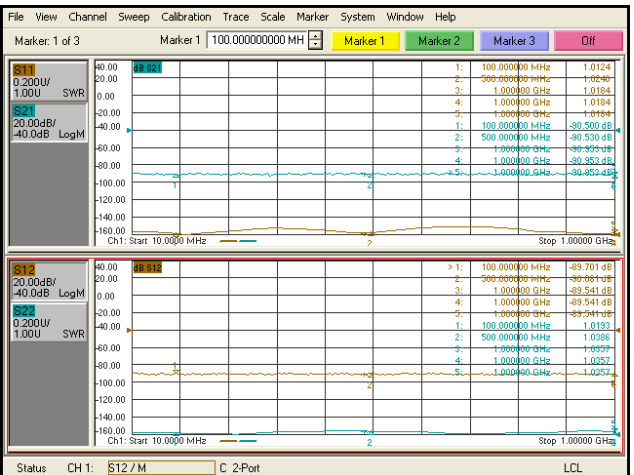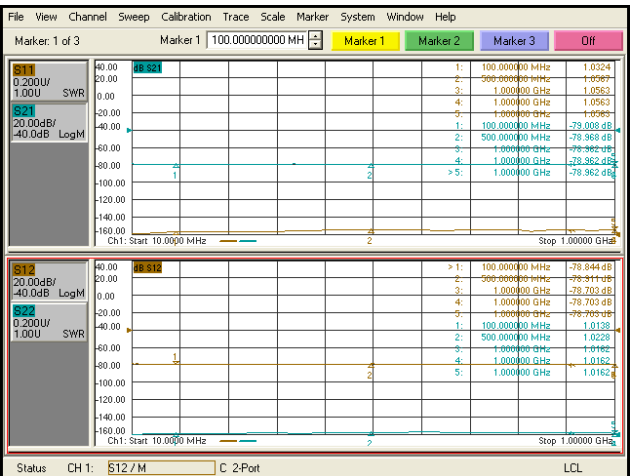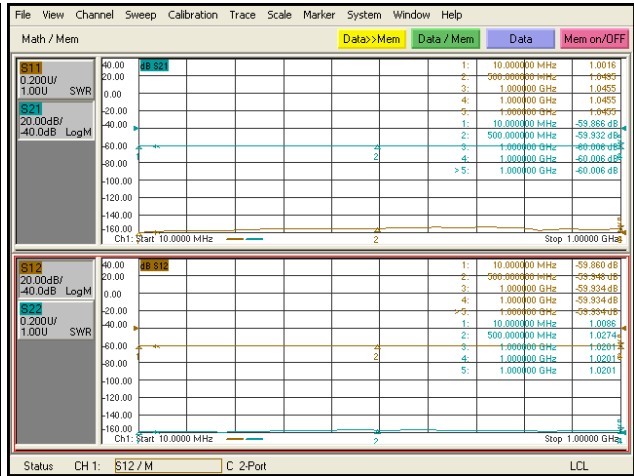
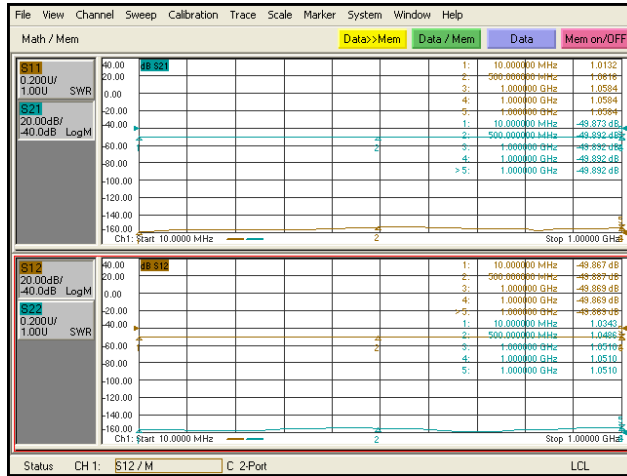




RF-LAMBDA

The power beyond expectations

RKT2G1A130

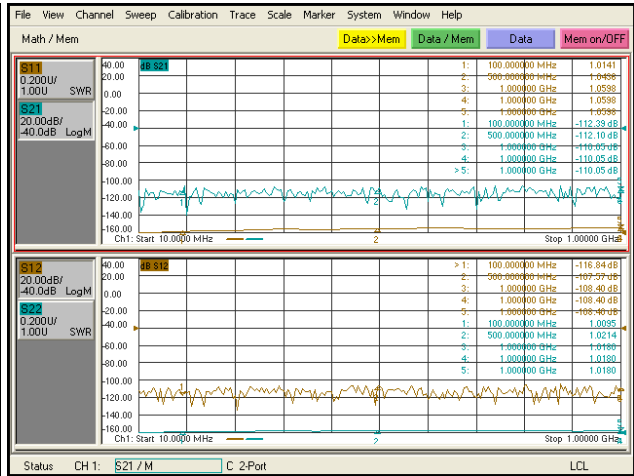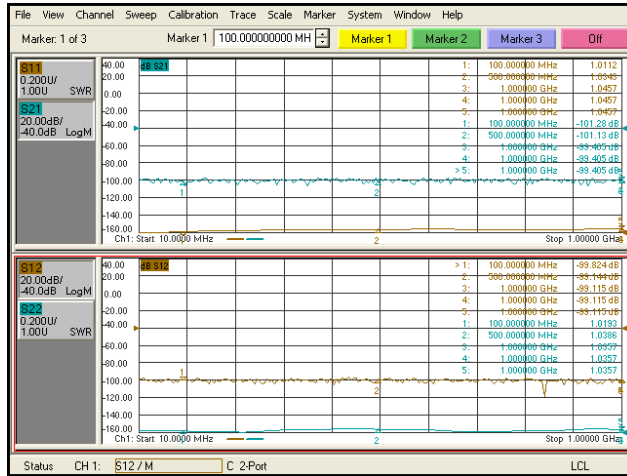

MANUAL CONTROL STEP ATTENUATOR

(DC-16GHZ 130DB RANGE)