




# RF-LAMBDA

The power beyond expectations

## MANUAL CONTROL STEP ATTENUATOR (DC-2GHz 10DB RANGE)

### Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- High power handle up to 100W CW upon request
- Custom Configurations Available Upon Request.

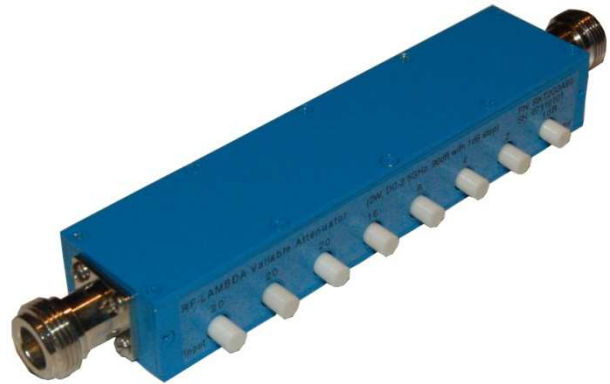

### Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.


Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT5G2K10	DC-2GHz	5	10	0.1	1.30	<1.6	± 0.3

Connector: F type, weight: 250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

**PN: RKT 5 G X X 10**

Manual Control Attenuator    Power Handle In Watt    Freq Unit GHz    Freq Number    Product Type    Attenuation Range

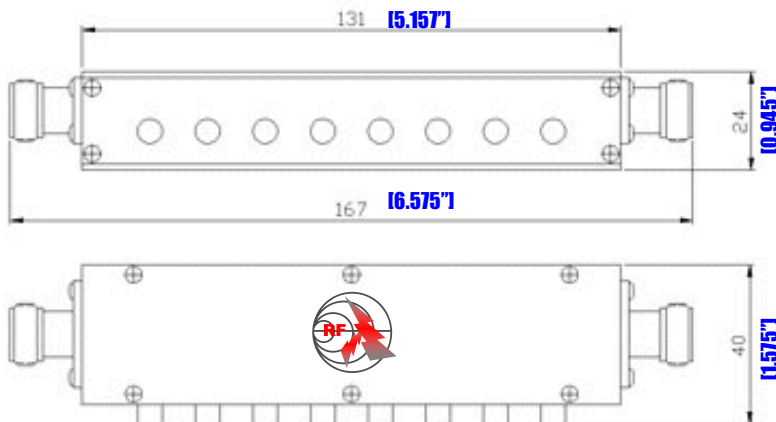

MANUAL CONTROL STEP ATTENUATOR

(DC-2GHz 10DB RANGE)