





## X Band Drop-in Isolator

RFLI-503					
Part Number	Frequency (GHz)	Bandwidth (MHz)	Insert. Loss (dB)	Isolation (dB)	VSWR
RFLI-503-1	6.0~10	300	0.3	25	1.15
RFLI-503-2		600	0.4	23	1.20

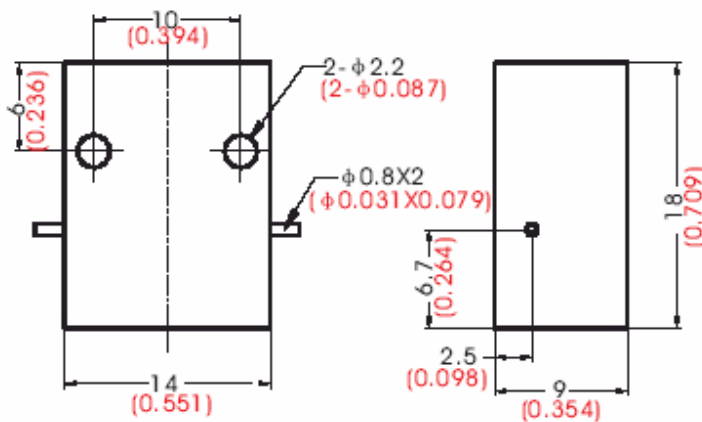

Case Type: Drop-in  
 Operating Temperature: -40~+70°C  
 Forward Power: 10W (CW)  
 Reverse Power: 2W (CW)  
 Higher power unit available upon request

RFLI-504					
Part Number	Frequency (GHz)	Bandwidth (MHz)	Insert. Loss (dB)	Isolation (dB)	VSWR
RFLI-504-1	6.0~10	300	0.3	23	1.20
RFLI-504-2		600	0.4	20	1.25

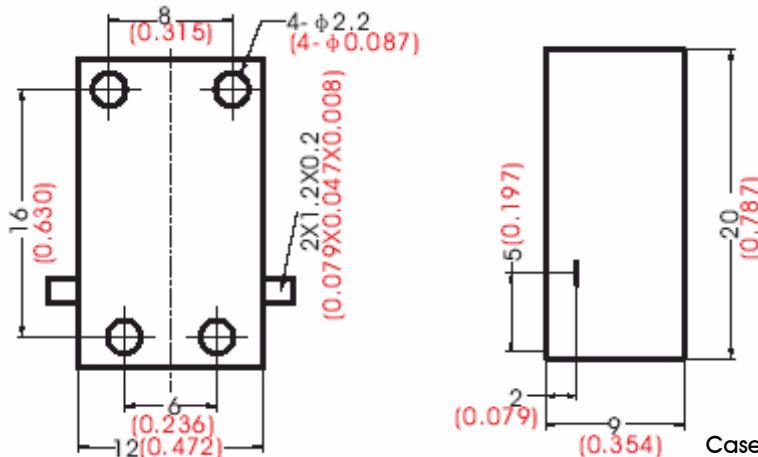

Case Type: Drop-In  
 Operating Temperature: -40~+70°C  
 Forward Power: 10W (CW)  
 Reverse Power: 2W (CW)  
 Higher power unit available upon request