

High Power Manual Phase Shifter Tuner DC-2GHz



Note: The photo is for illustration purposes only. Please refer to the outline drawing.

Product Description

RFPSHT0002W6 is a phase shifter tuner with a frequency range of DC to 2GHz.

The phase shifter's adjustment range 720 degrees. The insertion loss is 3dB with a max VSWR of 2.2:1.

Phase shifters are devices used to adjust transmission phase in a system,. RF-Lambda phase shifters provide low insertion loss, and equal amplitude (or loss) in all phase states.

The working temperature of this product is between - 10°C and + 50°C.

Features

- Manual Phase Shifter
- High Power Handling Capability
- Low Insertion Loss

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C)

Parameter	Min	Typ	Max	Units
Frequency Range		DC - 2		GHz
Insertion Loss			3	dB
*Phase Range		720		degrees
VSWR			2.2	:1
Average Power			50	W
Peak Power			5	KW
Weight		3.7		lbs
Connectors		SMA-Female		


*Phase Adjustment Range specification ONLY refers to the highest frequency point. The total phase adjustment range is proportional to the frequency range. HALF the frequency range means HALF of the phase adjustment range. For example 8GHz range 360deg, then 4GHz will be 180deg total range.

Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-10°C to +50°C (Case Temperature)
Storage Temperature	-40°C to +70°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +50°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

**For vibration testing details please see additional information section.

Outline Drawing

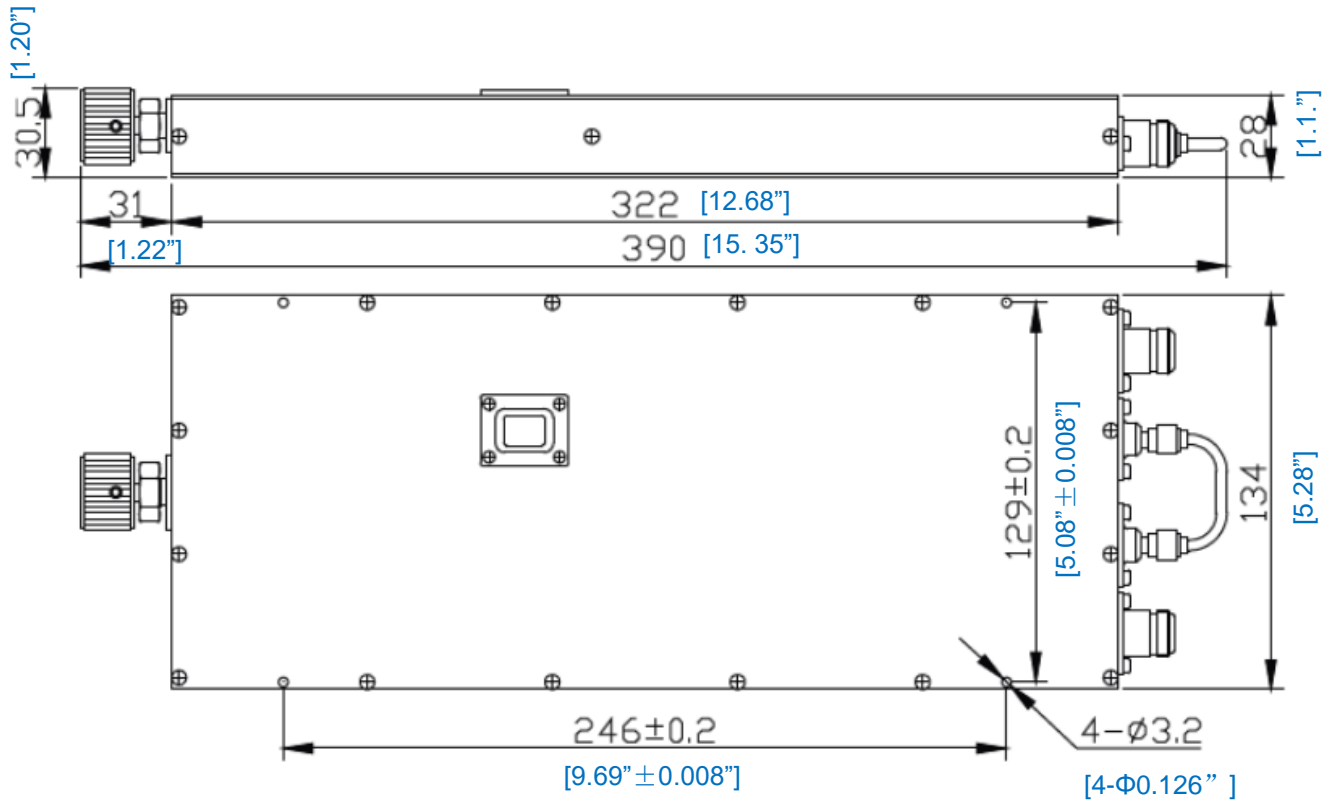

Notes:

1. External Finish : Body painted with blue/black epoxy enamel
2. All dimensions are in millimeters [inches].



Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFPSHT0002W6	Connector SMA-Female	DC-2GHz Manual Phase Shifter

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.