

## High Power Phase Shifter Tuner DC-6GHz



### Product Description

RFPSHT0006W4 is a high power phase shifter tuner with a frequency range of DC to 6GHz.

The phase shifter's adjustment range 540degrees. The insertion loss is 1.4dB with a max VSWR of 1.5:1.

Phase shifters are devices used to adjust transmission phase in a system,. RF-Lambda phase shifters provide low insertion loss, and equal amplitude (or loss) in all phase states.

The working temperature of this product is between - 10°C and + 50°C.

### Features

- Manual Phase Shifter
- High Power Handling Capability
- Low Insertion Loss

### Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

### Electrical Specifications (T<sub>A</sub>=+25°C)

Parameter	Min	Typ	Max	Units
Frequency Range		DC - 6		GHz
Insertion Loss			1.4	dB
*Phase Range		540		degrees
VSWR			1.5	:1
Average Power			100	W
Peak Power			5	KW
Weight		2.76		lbs
Connectors		N-Type or SMA-Type		

\*Phase Adjustment Range specification ONLY refers to the highest frequency point. The total phase adjustment range is proportional to the frequency range. HALF the frequency range means HALF of the phase adjustment range. For example 8GHz range 360deg, then 4GHz will be 180deg total range.


**Environmental Specifications and Test Standards**

Parameter	Description
Operational Temperature	-10°C to +50°C (Case Temperature)
Storage Temperature	-40°C to +70°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +50°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)


\*\*For vibration testing details please see additional information section.

**Typical Performance Plots**

**Insertion Loss & VSWR & Phase**

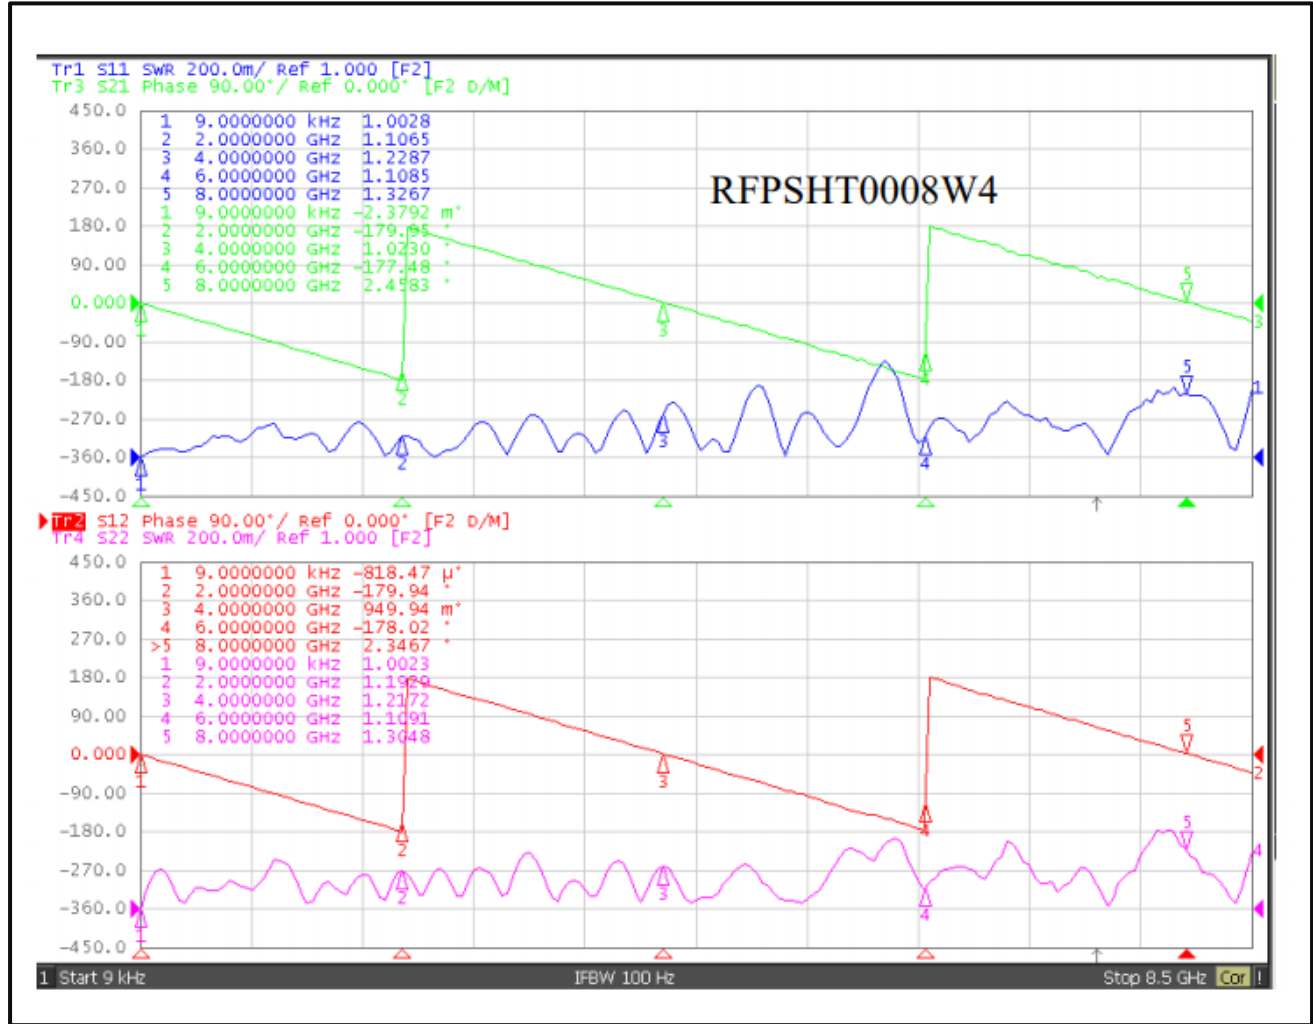

**Outline Drawing**

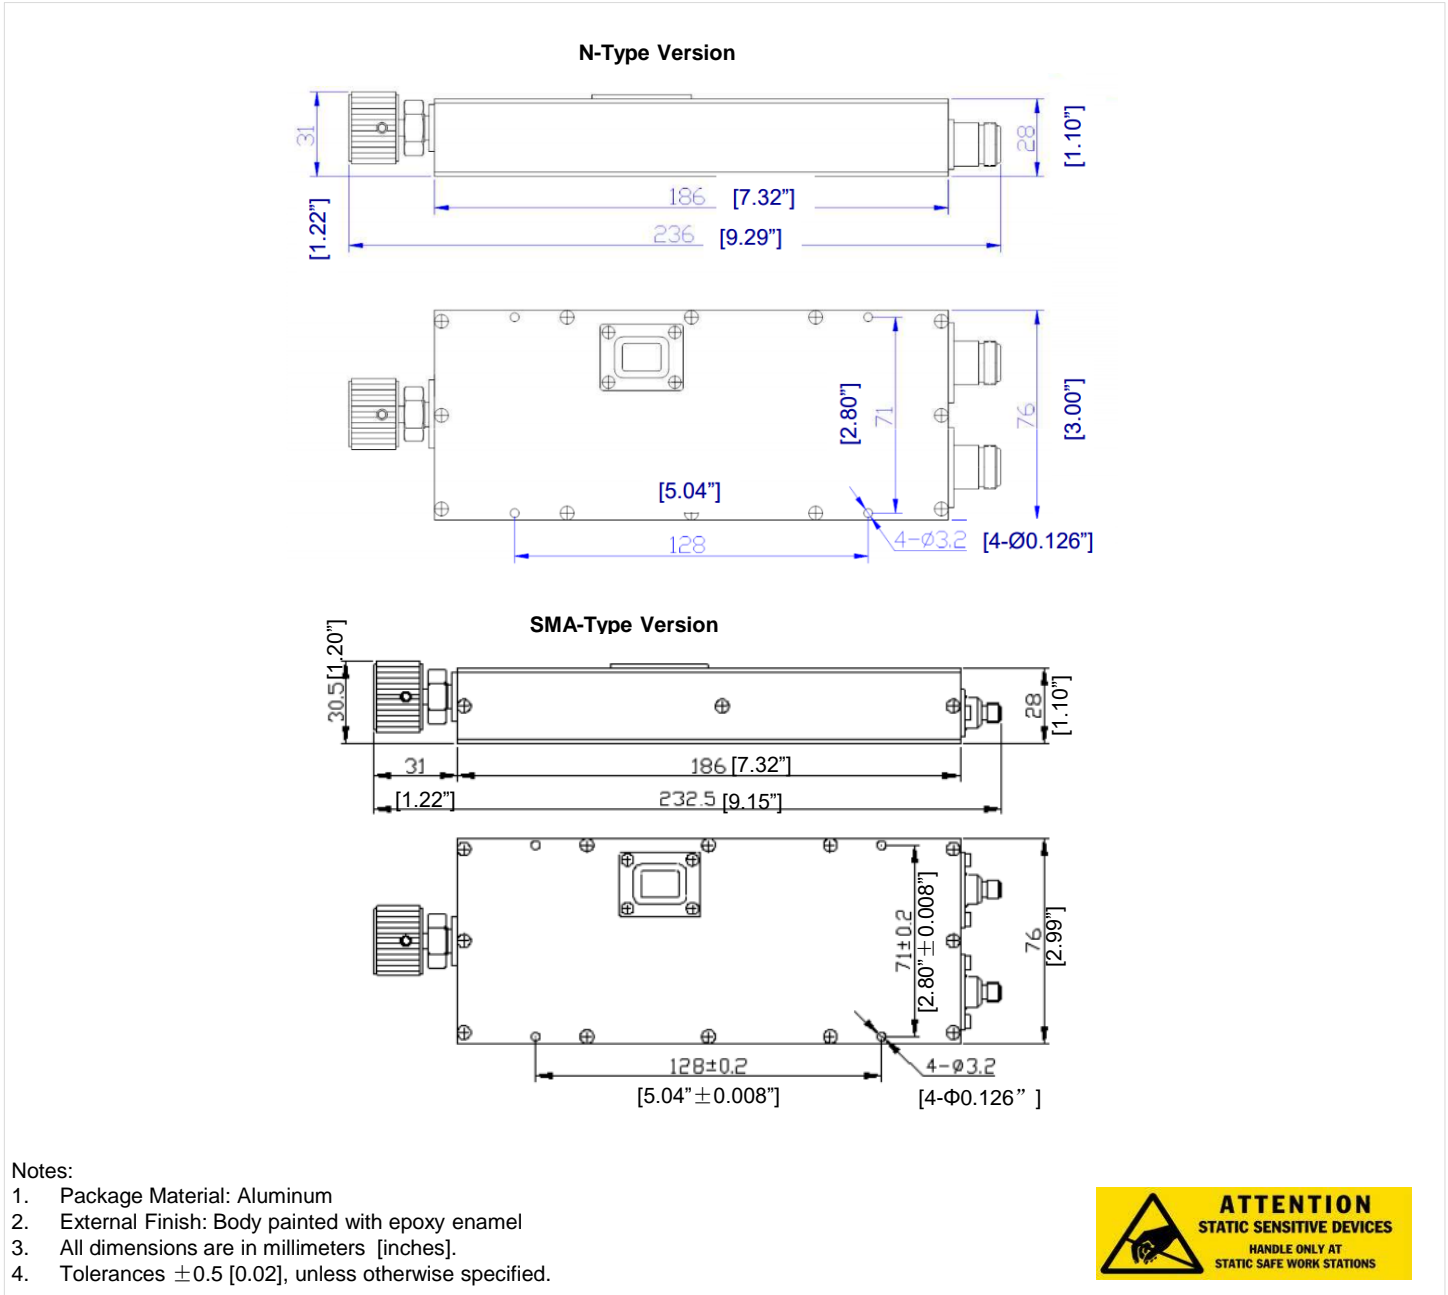

**Additional Information**

Documentation	Webpage
ESD Policy	<a href="https://rflambda.com/pdf/rflambda_esd_control.pdf">https://rflambda.com/pdf/rflambda_esd_control.pdf</a>
Connector Torque Specifications	<a href="https://www.rflambda.com/pdf/Torque_Specifications.pdf">https://www.rflambda.com/pdf/Torque_Specifications.pdf</a>
Random Vibration Test Standard	<a href="https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf">https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf</a>

**Ordering Information**

Part Number	Modification	Description
RFPSHT0006W4	Connector N-Type or SMA-Type	DC-6GHz Manual Phase Shifter

**Important Notice**

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.