



MANUAL CONTROL STEP ATTENUATOR (DC-2.5GHZ 10DB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- High power handle up to 10W CW upon request
- Custom Configurations Available Upon Request.





Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT10G3A10	DC-2.5GHz	10	10dB	1dB	1.40	≤1.8	±0.4

Connector: SMA / N type is available, weight: 160g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

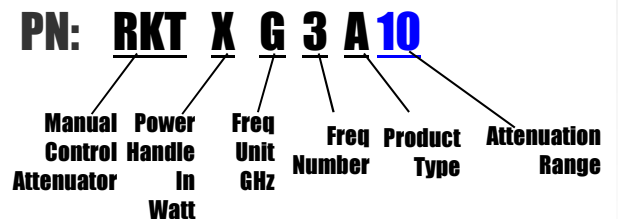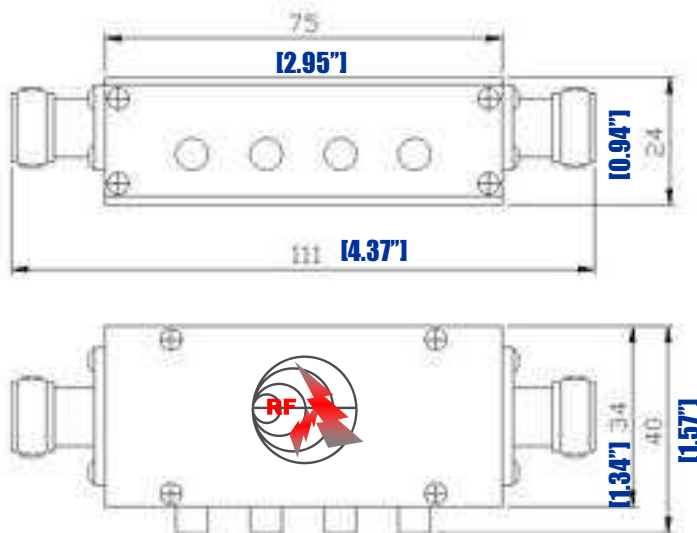

MANUAL CONTROL STEP ATTENUATOR

[DC-2.5GHZ 10DB RANGE]