



ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-2.5GHZ 10DB RANGE)

Product description


- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- Higher average power available upon request
- Custom Configurations Available Upon Request.



Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G3A10	DC-2.5GHz	2	10	1	1.25	<0.40	± 0.40

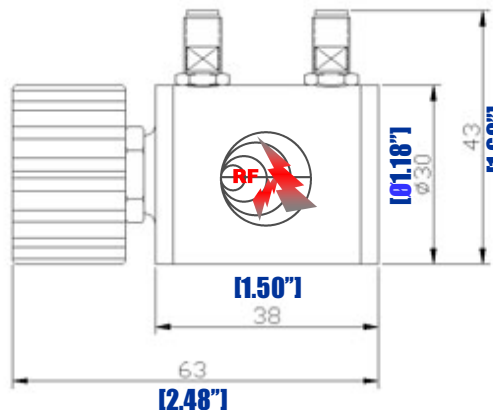

PN: **RKT 2 G X A 10**

Manual Control Attenuator | Power Handle In Watt | Freq Unit GHz | Freq Number | Product Type | Attenuation Range

Connector: SMA type, weight: 250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C


MANUAL CONTROL ROTARY ATTENUATOR (DC-2.5GH 10DB RANGE)



RF-LAMBDA

The power beyond expectations

RKT2G3A10

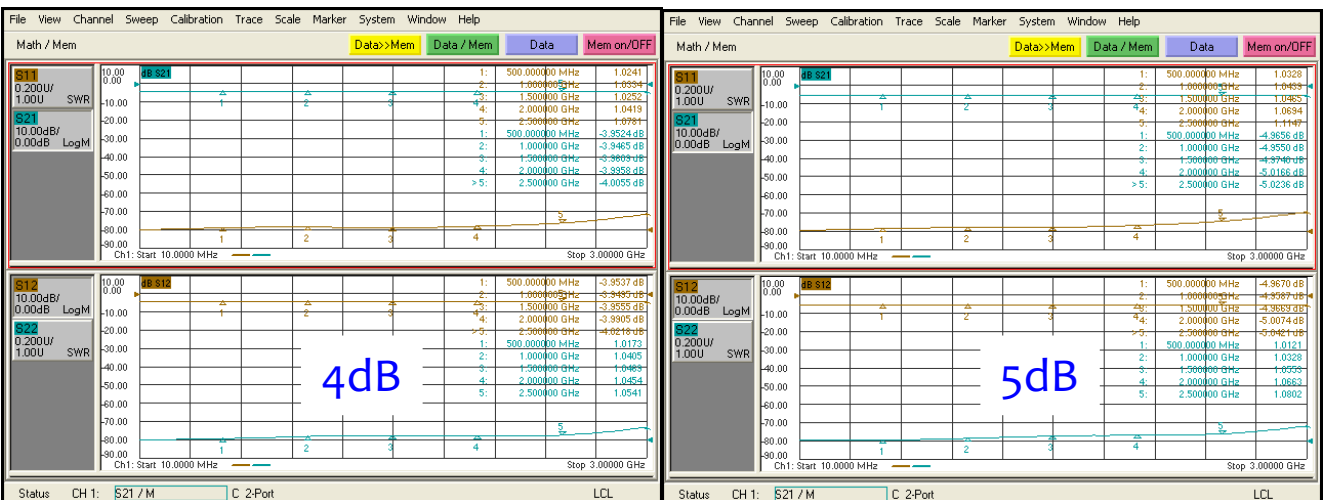

MANUAL CONTROL ROTARY ATTENUATOR (DC-2.5GH 10DB RANGE)



RF-LAMBDA

The power beyond expectations

RKT2G3A10

MANUAL CONTROL ROTARY ATTENUATOR (DC-2.5GH 10DB RANGE)

