



ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-1GHZ 90DB RANGE)

Product description



- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- Higher power is available upon request
- Custom Configurations Available Upon Request.



Applications:

Include Communication, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G1A90	DC-1GHz	2	90	10	1.20	<0.30	± 0.30 (<60dB) ± 3% (≥60dB)

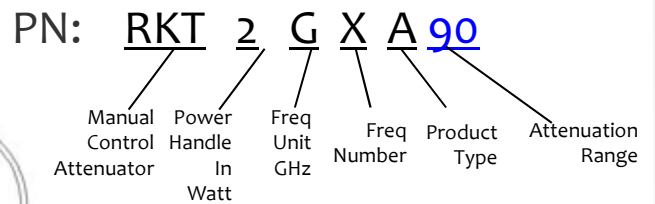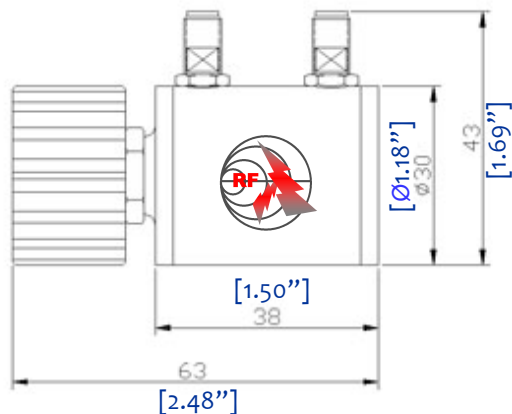

Connector: SMA type, weight: 250g

Temperature (Operational): -10° C ~ +50° C (Storage) -40° C ~ +70° C

MANUAL CONTROL ROTARY ATTENUATOR (DC-1GHZ 90DB RANGE)