



RF-LAMBDA

The power beyond expectations

RKT2G2A70

ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-2GHz 70dB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- 2W CW average power
- Custom Configurations Available Upon Request.





Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G2A70	DC-2GHz	2	70	1	1.25	<0.80	$\pm 0.3\text{dB} (\leq 10\text{dB})$ $\pm 0.8\text{dB} (\leq 60\text{dB})$ $\pm 1.5\text{dB} (>60\text{dB})$

Connector: SMA type, weight: 435g

Temperature (Operational): -10° C~+50° C (Storage)-40° C~+70° C

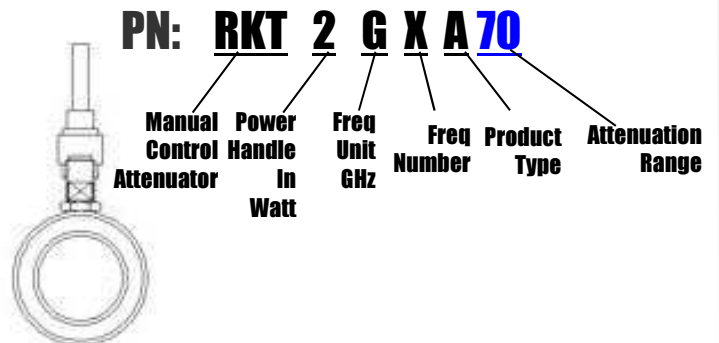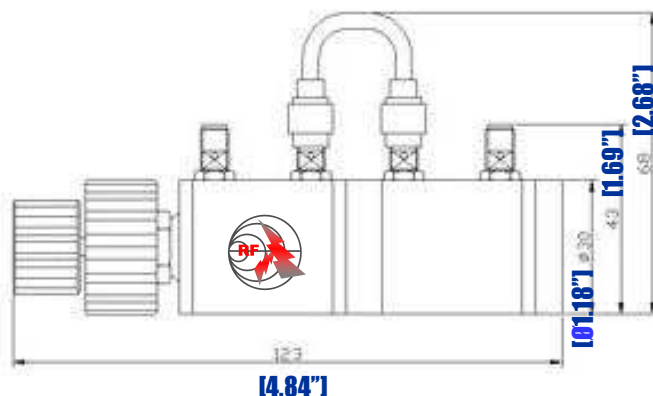

MANUAL CONTROL ROTARY ATTENUATOR (DC-2GHz 70dB RANGE)