



RF-LAMBDA

The power beyond expectations

RKT2G3K60

MANUAL CONTROL STEP ATTENUATOR (DC-3GHZ 60DB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- High power handle up to 10W CW upon request
- Custom Configurations Available Upon Request.






Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G3K60	DC-2.5GHz	2	60dB	1.0dB	1.40	≤3.6	± 0.5 (single) ± 0.75 (16dB)

Connector: SMA / N type is available, weight: 250g

Temperature (Operational): -10°C~+50°C (Storage) -40°C~+70°C

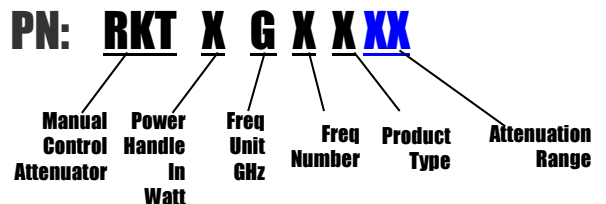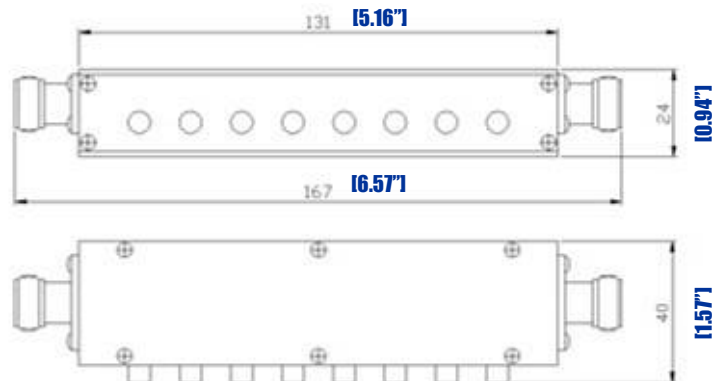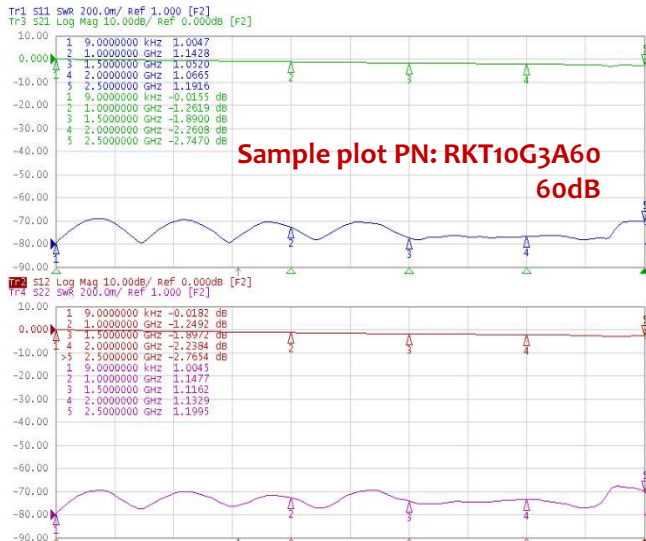

MANUAL CONTROL STEP ATTENUATOR (DC-3GHZ 60DB RANGE)




RF-LAMBDA

The power beyond expectations

RKT2G3K60

MANUAL CONTROL STEP ATTENUATOR (DC-3GHz 60dB RANGE)

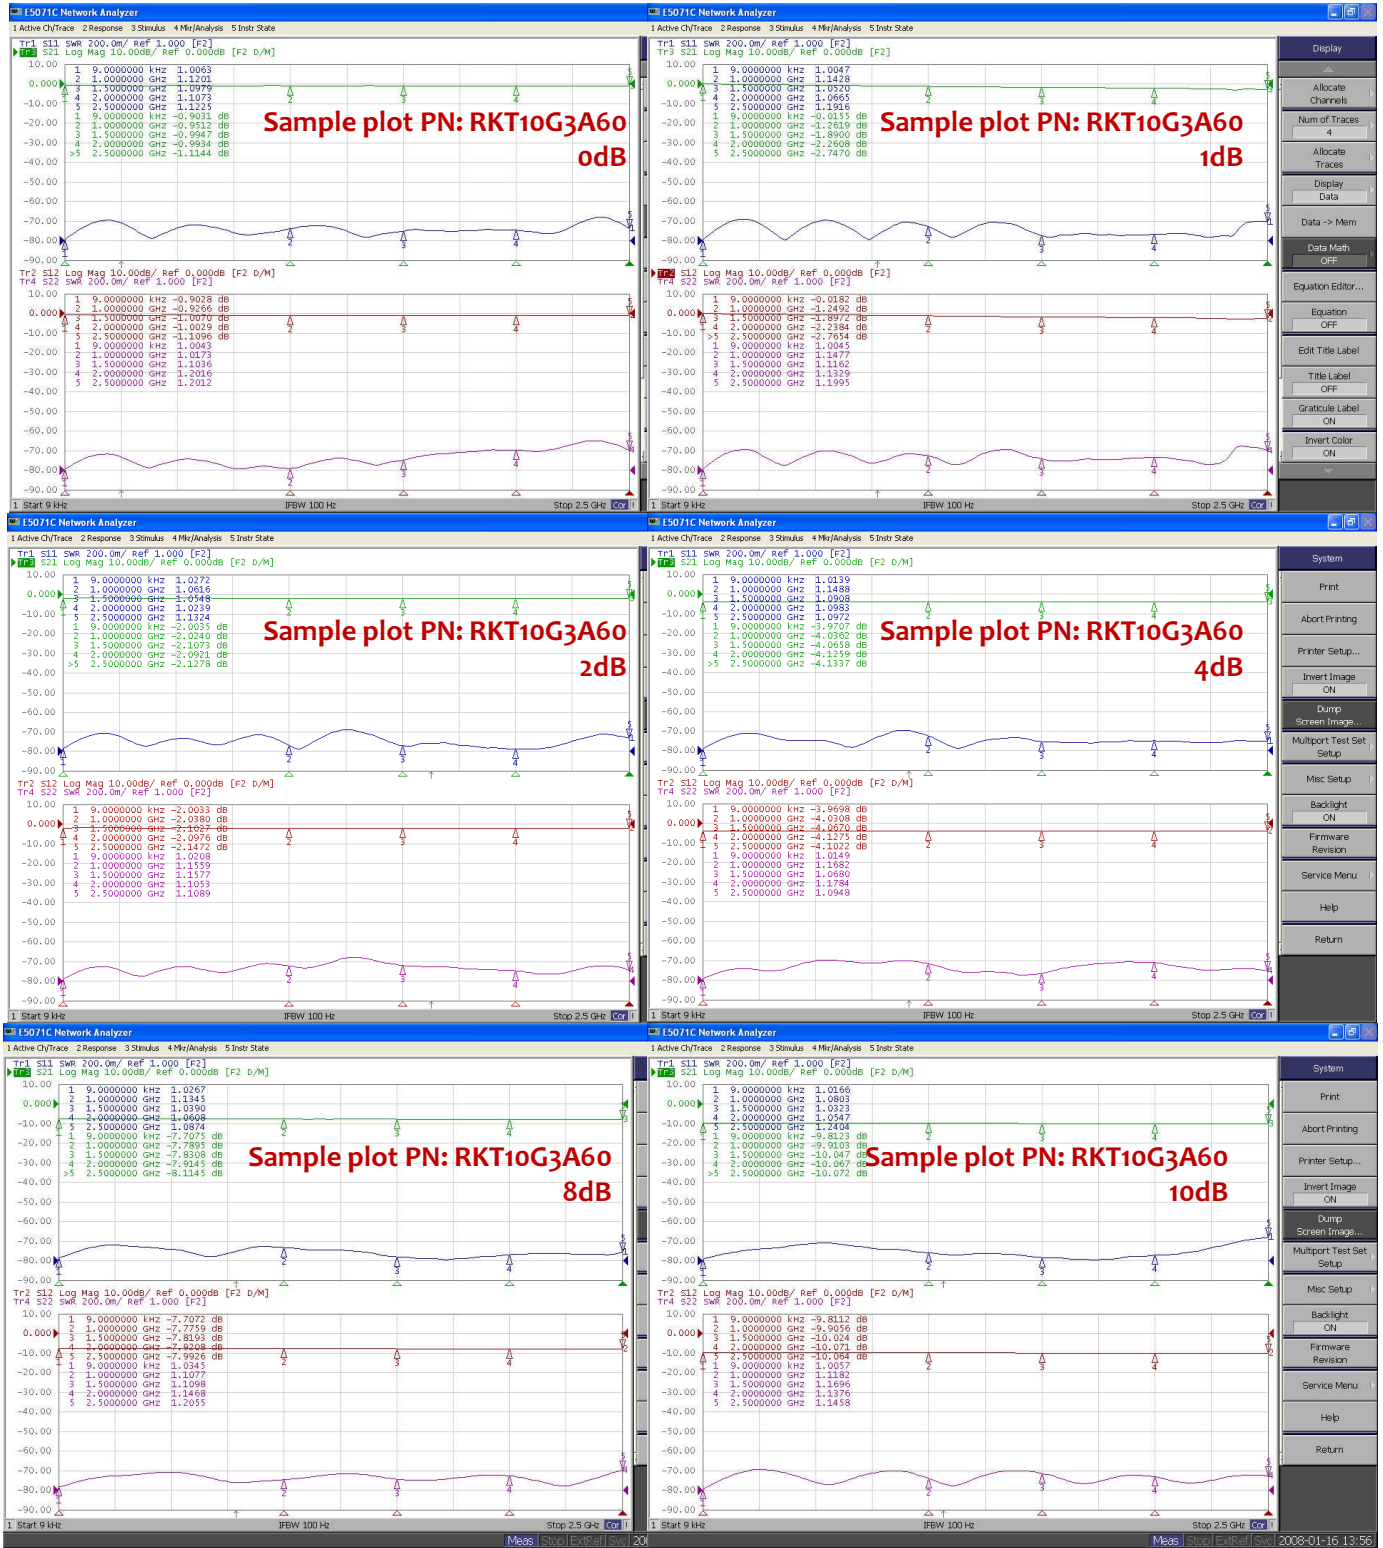



RF-LAMBDA

The power beyond expectations

RKT2G3K60

MANUAL CONTROL STEP ATTENUATOR (DC-3GHz 60dB RANGE)

